

ALINCO

Quality. Style. Performance!

VHF MOBILE / BASE TRANSCEIVER


DR-CS20



ALINCO's Personal Service Mobile Radio for Multiple Applications

The DR-CS20 is a high technology PLL synthesized radio that delivers high performance in a small package. User-friendly configuration and programmable features make the DR-CS20 the radio of choice for most demanding users.

CS20

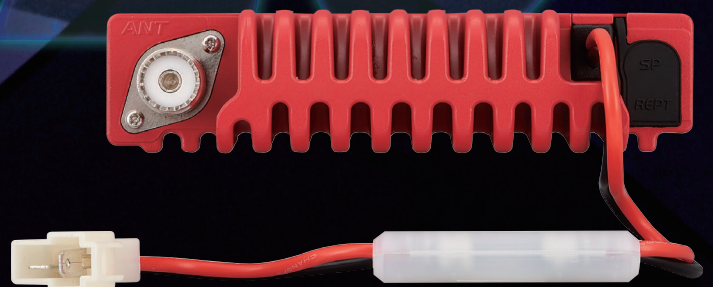

FEATURES

- Output power selectable 10W/5W/2W
- PC-programmable by dealer
- Channel, Frequency and Alphanumeric display
- Wide variety of selective calling features built-in; 2-Tone, 5-Tone, 50 CTCSS, 114 DCS, 4 Tone-burst tones and DTMF/ANI decode
- Large, bright LCD and easy-to-operate backlit keys
- Multi-function, backlit microphone enables direct frequency entry & more from keypads
- Various scan modes, alarm, automatic on/off, key lock, remote-control microphone and more at NO extra costs!



Standard accessories

Standard accessories are our factory default and may vary at moment of sales depending on the market and Dealers' sales policy.

Spare accessories

ADUA38 : DC Power Cable (15A Fuse)
EMS-74 : Backlit microphone with keypad

Dealer options for programming

EDS-29 : Cloning cable
ERW-12 : PC cable

SPECIFICATIONS

General

Frequency Range	CH001~CH160 (245.000~246.9875MHz)
Number of Channels	200 channels programmable by dealer
Channel Spacing	12.5KHz (Narrow mode)
Current drain (approx.)	300mA stand by / 600mA RX Less than 5A TX
Operating Voltage	13.8V DC \pm 15%
Squelch	Carrier / CTCSS / DCS / 5Tone / 2Tone / DTMF
Frequency Stability	\pm 2.5ppm
Operating Temperature	-20°C~+60°C
Dimensions	140 (W) x 34 (H) x 164(L) mm approx.
Weight	approx. 0.91kg

Receiver

System	Double conversion superheterodyne
Sensitivity (12dB Sinad)	0.35 μ V
Adjacent Channel Selectivity	\geq 60dB
Intermodulation	\geq 60dB
Spurious Rejection	\geq 70dB
Audio Response	+1~-3dB (0.3~2.55KHz)
Hum & Noise	\geq 40dB
Intermod. Freq. (1st/2nd)	38.85MHz / 450KHz
Audio power output	> 2W@10%
Audio Impedance	8 Ω

Transmitter

Power Output	10W / 5W / approx.2W
Modulation	8K50F3E
Adjacent Channel Power	\geq 60dB
Hum & Noise ratio	\geq 36dB
Spurious Emission	\geq 70dB
Audio Response	+1~-3dB (0.3~2.55KHz)
Audio Distortion	\leq 5%
Mic. Impedance	1k Ω

☞ Specifications are subject to change without notice due to advancements in NOTE technology.

※ Peripherals like an antenna, mounting hardware, coax cable etc are required for proper operation.

ATTENTION

- The utility software may be available to distributors/dealers only. USB programming cable is required. The manufacturer will not release the software to unauthorized party so please contact your dealer for details.
- This product may be blocked for operations before sales and only dealers can program the radio before delivery to consumers. Manufacturer is not aware of details of such dealer-programming therefore please kindly contact your dealer first in case technical-service may be necessary.

Authorized Dealer:

Copyright Alinco, Inc., Osaka, Japan. All rights reserved. Although Alinco has designed this brochure to be as accurate and comprehensive as possible, we reserve the right to make changes at any time to our equipment line, optional accessories, specifications, standard accessories, or availability of any such devices we manufacture and distribute. Please note that certain products and accessories may not be available in all countries of distribution therefore consult your Authorized Alinco Dealer for product availability and pricing. Colors of images herein may appear slightly different from actual products due to print.
* Projections are not included in the declared dimension values.

ALINCO, INC. Electronics Division

Yodoyabashi Dai-Bldg 13F, 4-4-9 Koraihashi,
Chuo-ku, Osaka 541-0043 Japan
Phone: +81-6-7636-2362 Fax: +81-6-6208-3802
<http://www.alinco.com>
E-mail: export@alinco.co.jp